



# POINT-SUPPORTED GLASS CURTAIN WALL

KW SYNERGY  
since 1997

\*TEMPERED GLASS MUST BE  
used to resist stress concentration

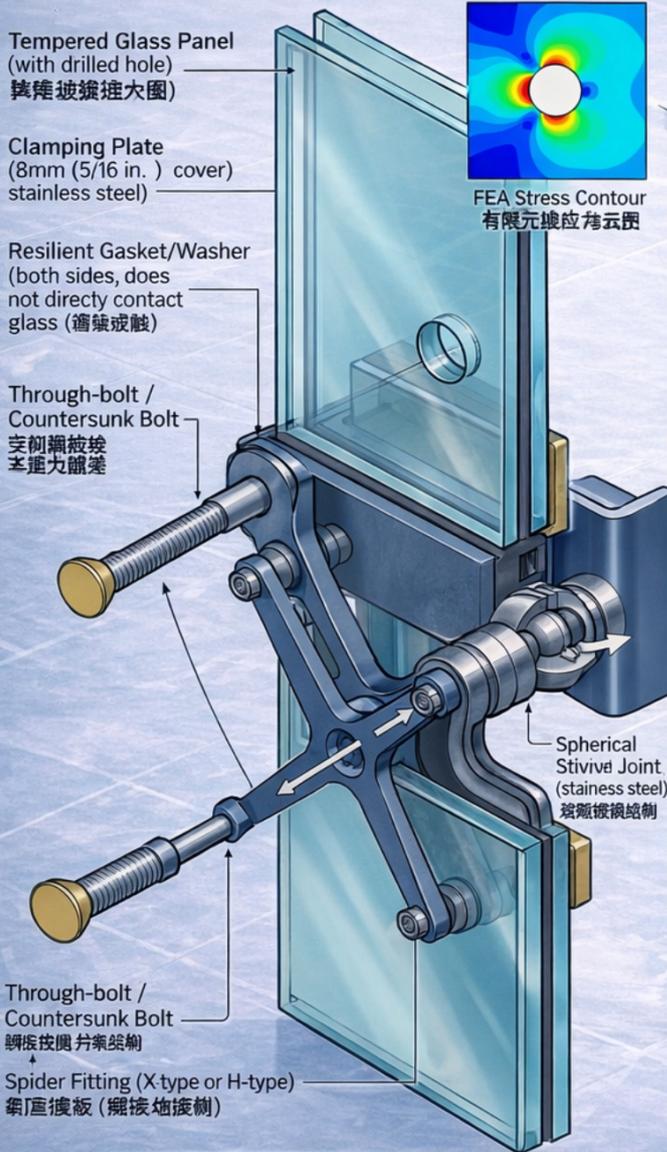

Facton as at Work  
Site Materials

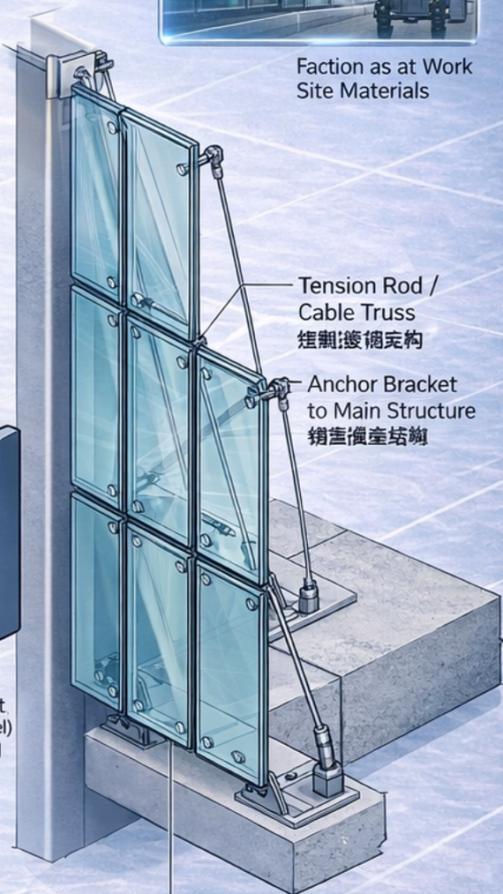

Tension Rod / Cable Truss	Galvanized Steel
Anchor Bracket to Main Structure	Stainless Steel
Stainless Steel	Main Building Structure (Slab/Bram)
Spider Fitting (X-type or H-type)	Galvanized Steel
Resilient Gasket / EPDM	Spider Fitting
	Resilient Gasket / EPDM

Building Excellence Since the 1990s

KW SYNERGY  
kysynergy.net